
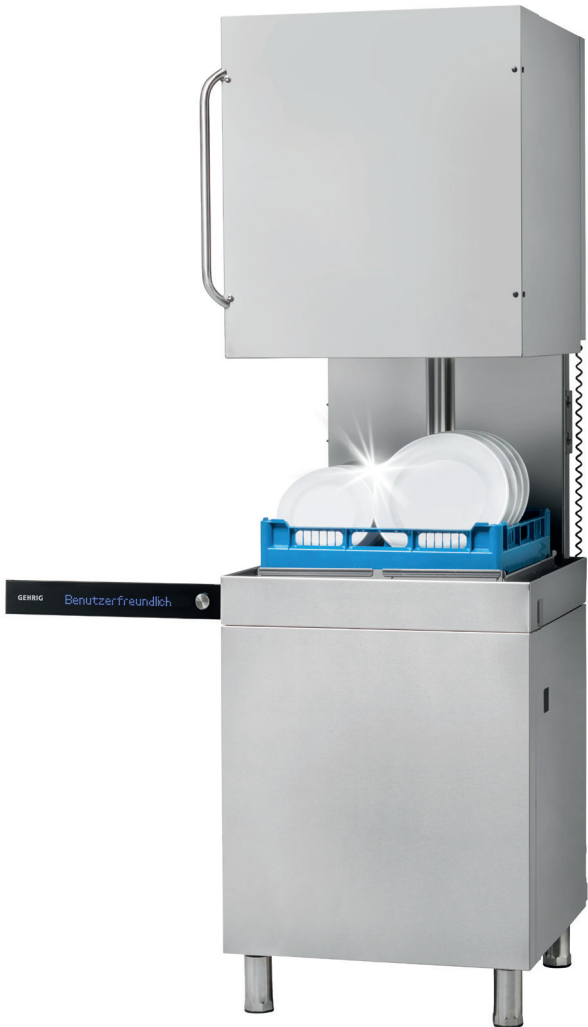


GEHRIG Ariane GTW 3700 dishwasher

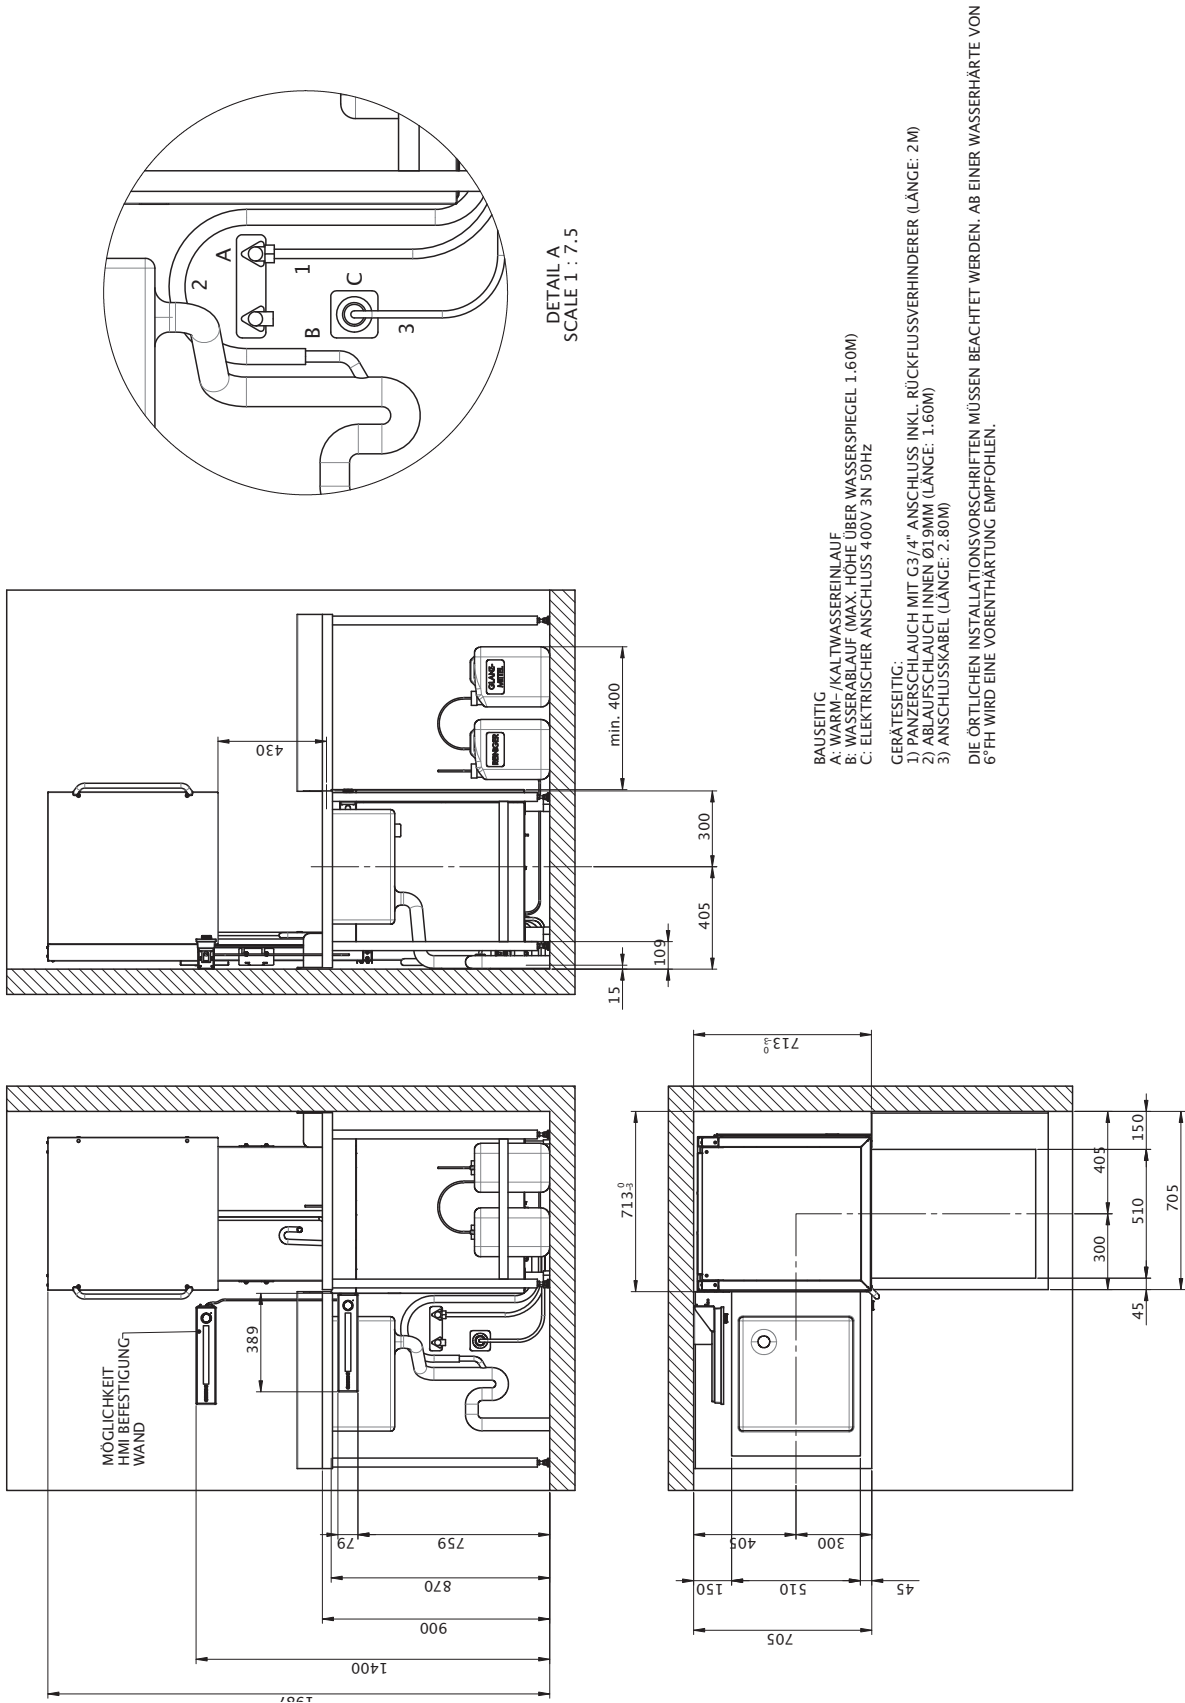

Product details

- Hood dishwasher for glasses, crockery, cutlery and pans
- Suitable for 500 x 500 mm dishwasher racks
- Ample loading height of 440 mm
- Extremely simple operation using rotary pushbutton, text and status display
- Sturdy chrome-nickel steel tank, frame, tank filter, wash and rinse arms and panelling
- Double-walled hood closed on 5 sides
- Patented rotation monitoring of the wash and rinse arms
- 4-stage filter system
- Dirt caught in the filter screen is pumped out after every wash cycle
- Integrated dosing devices for dishwashing detergent and shine and rinse aid
- 8 factory-set programmes
- Automatic mode
- Steam rinse cycle for low water consumption: 1.7 l/rack
- Programmes are configured and can be adapted within specified limits
- Perfect dishwashing results with AQUALYT detergent
- Rounded corners in one-piece wash tank for easy cleaning
- 4 languages
- Gateway for real-time machine data via IoT platform GG+connect

Options

- Hygiene programme for thermal disinfection
- High-pressure programme for heavily soiled wash items
- Hood opens and closes automatically
- Extensive range of GEHRIG dishwasher racks
- Conductivity sensor

SWISS
MADE

Features and benefits

- Every wash programme produces impeccable wash results in the blink of an eye
- Low operating costs thanks to low water and energy consumption values
Performance values in accordance with EN IEC 63136 – see product data sheet
- Hygiene programme for the most stringent cleanliness requirements achieves excellent levels of disinfection in just a few minutes (optional)
- Sturdy and reliable, Swiss high-quality product
- GG+connect provides an overview of the machine fleet and machine statuses any time and from anywhere
- Digital access to HACCP data with one-click PDF download
- Faults and misuse are detected and reported by email, text message or push notification.
The desired delivery method can be customised and configured for every user using GG+connect.
- Automatic detergent replenishment; GG+connect determines the optimum reordering schedule and replenishes reserves in good time based on consumption values.

Technical data

Product line		Ariane GTW 3700			
Model variant		GTW 3700	GTW 3700-H	GTW 3700-A	GTW 3700-HA
Product number		1048992	1070958	1070961	1070959
Technical properties					
Theoretical rack throughput	Racks/h	40			
Water consumption	l/rack	1.9 / 1.7 with steam rinse			
Cycles times	S	90 / 150 plus special programmes			
Dimensions					
Size (WxHxD)	mm	630 x 1517 (1987) x 695			
Loading height	mm	440			
Rack size /including racks with high sides)	mm	500 x 500			
Tank capacity	l	25			
Weight	kg	146			
Electrical parameters					
Voltage	V	400 3N~ 50Hz			
Rated power	kW	9.2			
Fuse protection	A	16			
Tank heater	kW	3			
Boiler heater	kW	5.5			
Pump power	kW	0.6			
Ambient conditions					
Emission sound pressure level L _{pA}	dB (A)	60 ¹			
Water supply					
On-site water pressure	MPa	0.1 - 1			

Product line		Ariane GTW 3700			
Model variant		GTW 3700-D	GTW 3700-DA	GTW 3700-HD	GTW 3700-HDA
Product number		1049068	1070946	1070955	1070960
Technical properties					
Theoretical rack throughput	Racks/h	40			
Water consumption	l/rack	1.9 / 1.7 with steam rinse			
Cycles times	s	90 / 150 plus special programmes			
Dimensions					
Size (WxHxD)	mm	630 x 1517 (1987) x 695			
Loading height	mm	440			
Rack size /including racks with high sides)	mm	500 x 500			
Tank capacity	l	25			
Weight	kg	146			
Electrical parameters					
Voltage	V	400 3N~ 50Hz			
Rated power	kW	9.2			
Fuse protection	A	16			
Tank heater	kW	3			
Boiler heater	kW	5.5			
Pump power	kW	0.65			
Ambient conditions					
Emission sound pressure level L _{pA}	dB (A)	58 (normal pressure) ¹ / 62 (high pressure) ¹			
Water supply					
On-site water pressure	MPa	0.1 - 1			

¹Measurement uncertainty K_{pA}= 2.5 dB

